

DESCRIPTION


Shut-off valves series "EZVL" are produced with connections G 3/8, G 1/2 and G 1 and they are fit to be locked in the exhaust position by means of a standard padlock.

TECHNICAL DATA


Maximum pressure	16 bar
Working temperature	0 ± +50 °C (-10 °C with dry air)
Fluid	Filtered, lubricated and unlubricated compressed air
Port size	G 3/8 - G 1/2 - G 1
Flow rate at 6 bar ΔP=1 bar	G 3/8 = 2400 NL/min G 1/2 = 3150 NL/min G 1/2 = 4250 NL/min
Type of mounting	Modular and in-line

MATERIALS

Body	Anodized aluminium alloy
Seals	NBR rubber
Slider	Anodized aluminium alloy



DIMENSIONS AND WEIGHTS EZVL

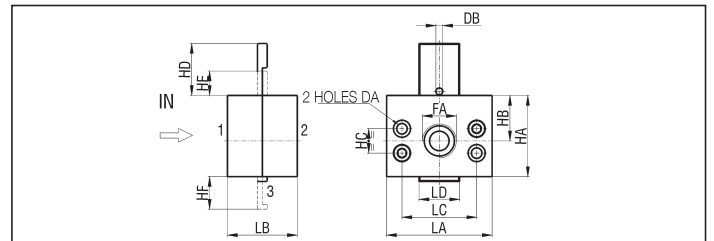


TYPE	DA	DB	FA	HA	HB	HC	HD	HE	HF	LA	LB	LC	LD	WEIGHT (g)
EZVL/3	5,5	4,2	G 3/8	50	25	-	36	15	21	50	39	35	25	260
EZVL/2	6,5	4,2	G 1/2	50	28	15	32	15	20	65	43	46	25	370
EZVL/1	6,1	4,2	G 1	60	30	-	34	15	22	80	60	60	25	700


ACCESSORIES

MOUNTING BRACKET G 3/8 - UZRHS (see drawing on page 4.8)


MOUNTING BRACKET G 1/2 - EZS2/3

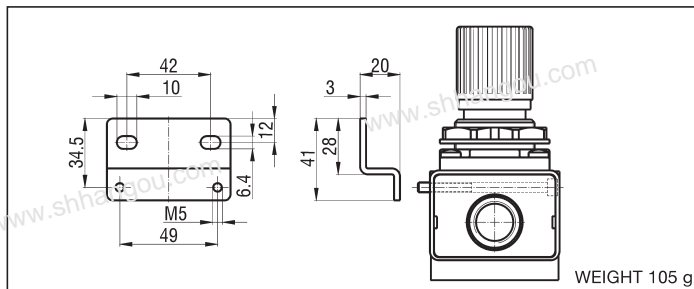

INTERMEDIATE AIR INTAKE G 3/8 - EZPA3/3 (screws included)

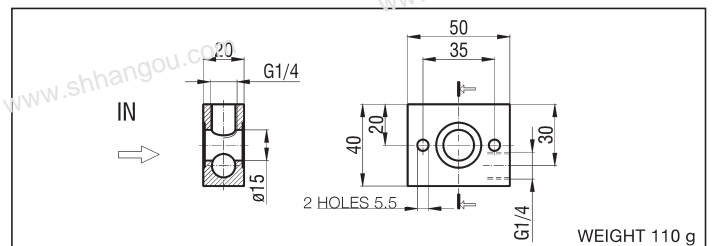

INTERMEDIATE AIR INTAKE G 1/2 - EZPA2/3 (screws included)

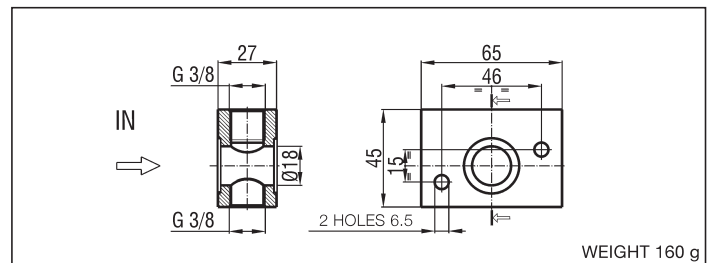

ASSEMBLY SCREWS

DESCRIPTION	SIZE		
	3	2	1
Assembly screws F+R+L	EZ3/SVG	EZ2/SVG	EZ1/SVG
Assembly screws FR+L	EZ3/SVG/1	EZ2/SVG/1	EZ1/SVG/1
Assembly screws F+L	EZ3/SVG/2	EZ2/SVG/1	EZ1/SVG/2
Assembly screws FR+L+AP - R+L+AP	EZAP3/SVG	EZAP2/SVG	EZAP1/SVG
Assembly screws FR+AP - R+AP	EZAP3/SVG/1	EZAP2/SVG/1	EZAP1/SVG/1
Assembly screws VL+F+R	EZVL3/SVG	EZVL2/SVG	EZVL1/SVG
Assembly screws VL+FR - VL+R	EZVL3/SVG/1	EZVL2/SVG/1	EZVL1/SVG/1

WALL CLAMPING SCREWS

DESCRIPTION	SIZE		
	3	2	1
Clamping screws F-FR-R-L-AP	EZ/SVG/P3	EZ/SVG/P2	EZ/SVG/P1

INTERMEDIATE AIR INTAKE G 1 - EZPA1/3 (screws included)

